


This instruction sheet is relevant to Phoebe LED Firesafe Downlight product code: 11175

THANK YOU for buying this PHOEBE LED product. To help ensure this luminaire gives complete satisfaction please only use it according to the following instructions, and then pass the instructions to the appropriate person for retention and future reference.

Warning

1. Installation only to be carried out by a qualified electrician
2. Please ensure surface is suitable and capable of holding the luminaire and driver weight
3. Pre-cut hole before installation, (see below chart for hole diameter)
4. Do not operate if product is damaged
5. IP65 rated front with bezel, suitable for bathroom zones 1 & 2
6. This product is suitable for fire rated installations, Part L Compliant of UK Building Regulations, Part B Compliant BS476 Parts 21 and 22 – Suitable for 30 minute 600mm/15mm single layer Standard Wallboard, 60 minute 600mm/12.5mm twin layer Fireboard and 90 minute 450mm/15mm twin layer Fireboard ceilings

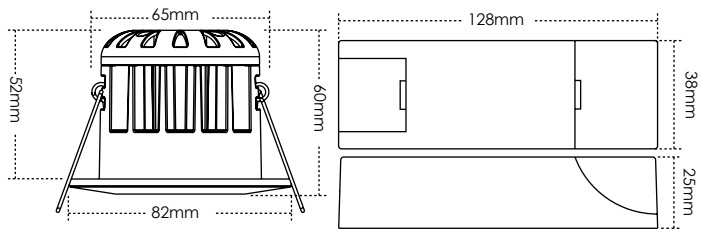

Product code	Power (W)	Colour Temp (K)	Cutout Ø
11175	10	3000, 4000, 6000	67-75

1

a. Switch off power
b. Prepare cut-out hole in your surface to specified dimensions as stated in above table.

2

a. Select desired colour output via front mounted switch - WW - 3000K, CW - 4000K, DL - 6000K.

3

a. Remove end cover to reveal push fit loop in/loop out terminal.
b. Connect the driver to mains AC200-240V electricity in accordance with current wiring regulations.

4

a. Place driver into recess then push back spring clips and insert luminaire into recess.

5

a. Ensure luminaire is a flush fit and has plenty of ventilation, do not cover with insulating material.

b. Place one of the supplied magnetic fascias to complete installation.

6

a. Switch power on at circuit

NB. For high voltage circuit insulation testing disconnect mains input supply first
(Do not circuit test using a Megger)

Changing Colour Temperature

To change colour temperature after installation

i. Ensure power is switched off.
ii. Remove magnetic bezel and switch to desired colour temperature.

iii. Replace bezel
iv. Switch power on at circuit

Images are for information only. Phoebe LED shall not be held liable for improper operation of the luminaire in circumstances where procedures and specifications have not been followed correctly. Crompton Lamps Limited 2018