




This instruction sheet is relevant to Phoebe LED Melina Round Bulkhead part codes: 6492, 6508, 10239, 10046, 10253, 10284, 10291, 10307, 10628 & 10635

THANK YOU for buying this PHOEBE LED product. To help ensure this luminaire gives complete satisfaction please only use it according to the following instructions, and then pass the instructions to the appropriate person for retention and future reference.


BEFORE YOU START
PLEASE READ ALL THE INSTRUCTIONS CAREFULLY

PRIOR TO INSTALLATION



Turn power off at the mains

ONLY ONCE INSTALLATION IS COMPLETE



Turn power back on at the mains

CIRCUIT TESTING


For high voltage circuit insulation testing disconnect mains input supply first
(Do not circuit test using a Megger)

Warning

1. Installation only to be carried out by a qualified electrician
2. Please ensure surface is suitable and capable of holding the lamp weight
3. Do not operate if product is damaged
4. Suitable for use in or outdoors IP66 rating
5. This product is not suitable for fire rated installations



1. Prepare the Melana bulkhead

- a. Remove outer ring and open the diffuser
- b. Twist the plastic locks to release LED tray and open
- c. Choose a location for power cable will pass
N.B. For the microwave sensor and emergency options only 1 rear entry point will be viable, on the combined emergency/microwave sensor model only side entry points **can be used**.
- d. Drill/cut $\varnothing 19\text{mm}$ hole in required position
- e. Insert rubber grommet to preserve IP rating
- f. If either side used drill hole up to $\varnothing 10\text{mm}$ in outer cover to pass cable through and replace

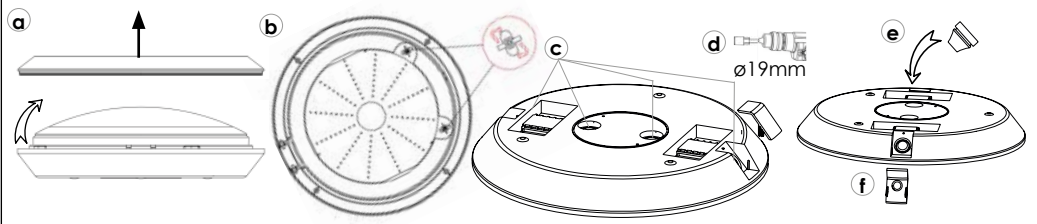

2. Prepare mounting surface


- a. For clip mount use the supplied drilling template, drill $\varnothing 8\text{mm}$ holes and insert supplied raw plugs
 - b. Align clips and screw into position
- a. For secured surface mount drill out the holes to $\varnothing 5\text{mm}$
 - b. Align to required position and mark drill points
 - c. Drill $\varnothing 8\text{mm}$ holes where marked and insert raw plugs

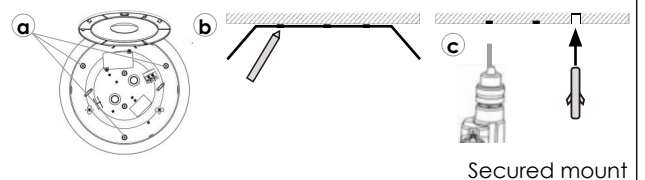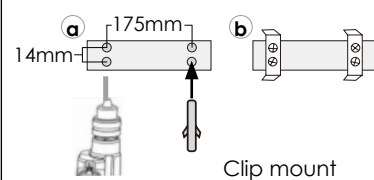

3. Wire to mains electricity


- a. Thread cable through the hole/s and grommet from section 1
- b. Terminate cables in accordance with current wiring regulations

Non-Emergency




Emergency

- Battery Duration: 3 hours
- Charge time: 24 hours




4. Attach Melana bulkhead

- a. For clip mount simply align with bulkhead and push into place




- a. For secured surface mount align holes with inserted raw plugs
- b. Screw into surface using supplied screws and screw seal rings
- c. If installed over a junction terminal use the supplied seal ring

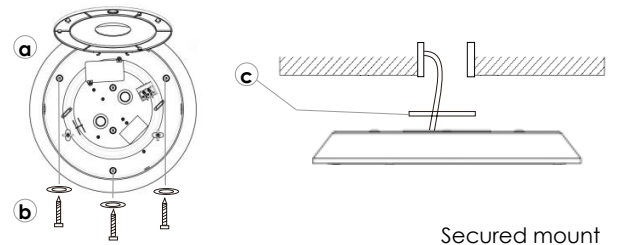



5. Close bulkhead

- a. Close the led tray and secure by twisting the plastic locks
- b. Close the diffuser and secure with the 4 screws provided
- c. Push the outer ring into place to complete installation

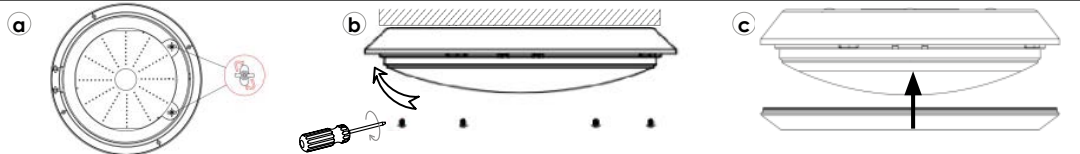

Images are for information only. Phoebe LED shall not be held liable for improper operation of the luminaire in circumstances where procedures and specifications have not been followed correctly. Crompton Lamps Limited 2017

Tel: +44 (0) 1274 657 088 **Fax:** +44 (0) 1274 657 087 **Web:** www.cromptonlamps.com



MELANA

LED BULKHEAD

Warning

Sensor adjustment should be done prior to install, for adjustments after installation please ensure mains power is turned off

**BEFORE YOU START
PLEASE READ ALL THE
INSTRUCTIONS CAREFULLY**

PRIOR TO ADJUSTMENT

Turn power off at the mains

**ONLY ONCE ADJUSTMENT
IS COMPLETE**

Turn power back on at the mains

1. Microwave detection

a. Daylight/High ambient light

The sensor will not trigger the light with motion when sufficient ambient light is present.

b. Dusk/Nighttime - Motion Detected

The sensor will trigger the light with motion when there is insufficient ambient light. Hold time can be set to 5s/90s/3min or 10min.

c. Dusk/Nighttime - After Detection

If active, light will dim to set level 10%/25% after the hold time and stay dimmed until stand-by time has expired, this can be set to 0s/30s/10min or ∞.

d. Dusk/Nighttime - After Hold/Standby

The sensor will switch off the lamp when no new motion detected after hold time/stand-by timers have expired.

2. Detection pattern

a. Wall mounted pattern (at 1.5m)

b. Ceiling mounted pattern (at 3m)

3. Microwave sensor settings

Detection area can be adjusted from 100% to 50% by toggling DIP switch 1. Exact detection pattern dependant on mounting height and orientation.

a. Detection area

ON	↑	1		
		I	ON	100%
		II	2-3	50%

b. Hold time

ON	↑	I	ON	ON	5S
		II	-	ON	90S
		III	ON	-	3min
		IV	-	-	10min

c. Daylight sensor

ON	↑	4	5		
		I	ON	ON	Disable
		II	-	ON	50Lux
		III	ON	-	15Lux
		IV	-	-	5Lux

d. Stand-by mode

ON	↑	6	7		
		I	ON	ON	0S
		II	-	ON	30S
		III	ON	-	10min
		IV	-	-	+∞

e. Stand-by dimming level

ON	↑	8		
		I	ON	10%
		II	-	25%

Dimming level for stand-by mode can be adjusted using DIP switch 8. Set to 10% or 25% as desired. Lamp will come out of stand-by on each new movement detection.

Hold time can be adjusted to one of the following four settings:

- I. 5 second hold
- II. 90 second hold
- III. 3 minute hold
- IV. 10 minute hold

During hold time the lamp will operate at 100% output. Toggle DIP switch numbers 2 & 3 as per table for desired selection.

The sensor can be adjusted to allow the lamp to illuminate only below a defined ambient threshold.

- I. **Disable** - Lamp will illuminate on motion detection regardless of ambient light level.
- II. **50 lux** - illuminate on motion detection during dusk and darker ambient light levels.
- III. **15 lux** - illuminate on motion detection during night/dark ambient light levels.
- IV. **5 lux** - illuminate on motion detection during very low ambient light levels only.

Toggle DIP switch numbers 4 & 5 as per table for desired selection.

The sensor can be adjusted to allow the lamp to operate at a dimmed stand-by mode after hold time has expired, the following four settings can be set:

- I. **0s** - Lamp will turn off after hold time expires.
- II. **30s** - Lamp will dim to set level and hold for 30 seconds before turning off.
- III. **10 min** - Lamp will dim to set level and hold for 10 minutes before turning off.
- IV. **∞** - Lamp will dim to set level and hold indefinitely.

Toggle DIP switch numbers 6 & 7 as per table for desired selection.

4. 3 Hour Emergency Version

Integrated automatic emergency function illuminates to 20% light output when power supply is disrupted

- Battery Duration: 3 hours
- Charge time: 24 hours

3 Hour
Emergency

Environmental Protection

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Images are for information only. Phoebe LED shall not be held liable for improper operation of the luminaire in circumstances where procedures and specifications have not been followed correctly. Crompton Lamps Limited 2017

Tel: +44 (0) 1274 657 088 **Fax:** +44 (0) 1274 657 087 **Web:** www.cromptonlamps.com