


KETO PLUS HIGH BAY

IP65 rated high powered LED highbay light

PHOEBE
LED

Instruction Sheet - Remote

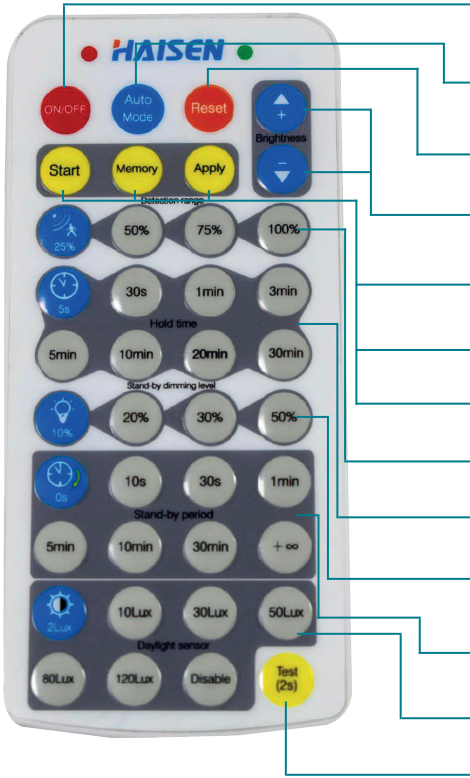

ON/OFF	Switches the light output on and off - Overrides all other settings. Note: If switched off using this button and mains power is removed, the fitting will still be "off" When power reapplied.
Auto Mode	Enables sensor after ON/OFF switch on.
Reset	Resets all settings to default - Brightness to Max, 100% Sensor detection, 5sec Hold Time, Standby time OFF, Daylight sensor disabled.
Brightness + & -	Adjust the brightness manually.
Start	Press to customise a scene, then adjust sensor detection sensitivity, daylight threshold, hold time, Standby dimming level & Period.
Memory	Press to save the above settings.
Apply	Press to apply to transmit saved settings to fittings, to program multiple fittings with the same settings.
Detection Area	Selection of sensor sensitivity level.
Hold Time	Length of time on full brightness before 'Dimmed Mode' or OFF.
Stand-By Dimming	Select the brightness in 'Dimmed Mode'
Stand-by Period	Select the length of time in 'Dimmed Mode'. 0s = No 'dimmed Mode', ∞ = Enters 'Dimmed Mode' but never goes OFF.
Daylight Threshold	Press to select daylight level. Disable = Ignore daylight sensor.
Test (2s)	Sensor hold time set to 2 seconds for testing.



Scan for more
information online

01274 657 088
info@cromptonlamps.com
cromptonlamps.com

Crompton Lamps Limited
Unit 2, Martree Business Park,
Bowling Back Lane,
Bradford,
BD4 8QE

Crompton
Lamps