






This instruction sheet is relevant to Phoebe LED Firesafe Downlight product code: 8908


THANK YOU for buying this PHOEBE LED product. To help ensure this luminaire gives complete satisfaction please only use it according to the following instructions, and then pass the instructions to the appropriate person for retention and future reference.

Warning


- 1. Terminal block not included. Installation only to be carried out by a qualified electrician
- 2. Please ensure surface is suitable and capable of holding the luminaire's weight
- 3. Pre-cut hole before installation, (see below chart for hole diameter)
- 4. Do not operate if product is damaged
- 5. IP65 rated, suitable for wet weather outdoor use when combined with suitable IP65 rated junction box
- S. It do rated, solitable for the Weather Solitable for fire rated installations, Part L Compliant of UK Building Regulations, Part B Compliant BS476 Parts 21 and 22 Suitable for 30 minute 600mm/15mm single layer Standard Wallboard, 60 minute 600mm/12.5mm twin layer Fireboard and 90 minute 450mm/15mm twin layer Fireboard ceilings

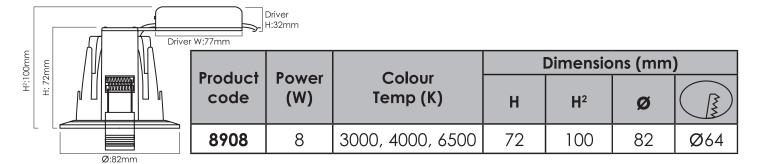


- a. Switch off power
 b. Prepare cut-out hole in your surface to specified dimensions as stated in above table.
 - O OFF
- 2 a. Choose bezel finish and align to grooves and push into place
 - **b.** Twist to 30° clockwise lock bezel onto front of luminaire.




a. Select desired colour output via switch - DL - 6500K,




 a. Using the attached cable, connect to mains AC200-240V electricity in accordance with current wiring regulations.



 a. Push back spring clips and insert luminaire into recess.



 a. Ensure luminaire is a flush fit and has plenty of ventilation, do not cover with insulating material



- **b.** Switch power on at circuit
- **NB.** For high voltage circuit insulation testing disconnect mains input supply first



(Do not circuit test using a Megger)