

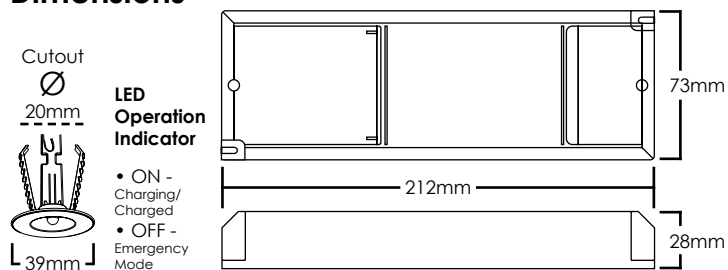
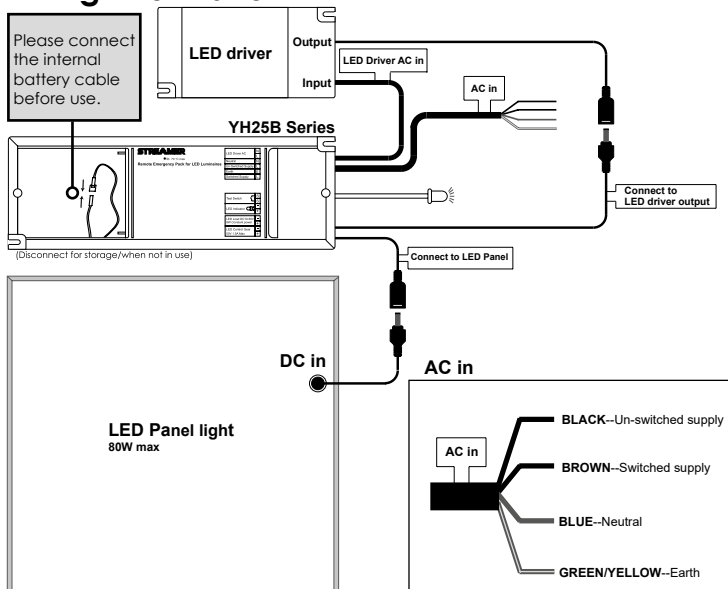


This instruction sheet is relevant to Phoebe Galanos Arteson LED 3-hour Emergency Kit with part code: 14527

For use with Phoebe LED 40W Galanos Arteson range of products only. Part codes: 14473, 14480, 14497, 14503

**THANK YOU for buying this PHOEBE LED product.** To help ensure this product gives complete satisfaction please only use it according to the following instructions, and then pass the instructions to the appropriate person for retention and future reference.

<p><b>BEFORE YOU START</b> PLEASE READ ALL THE INSTRUCTIONS CAREFULLY</p>	<h2 style="text-align: center;">IMPORTANT INFORMATION</h2>	
<p><b>PRIOR TO INSTALLATION</b></p>  <p>Turn power off at the mains</p>	<p>This product contains a nickel metal hydride battery (NiMH) After installation is complete please mark the unit with the installation date.</p> <p><b>Charge time:</b> 24hours The unit can be charged from 220-240v mains source</p> <p><b>Charging capacity:</b> 2200mAh <b>Discharge time:</b> ≥3 Hours</p>	
<p><b>ONLY ONCE INSTALLATION IS COMPLETE</b></p>  <p>Turn power back on at the mains</p>	<p><b>Dimensions</b></p>  <p><b>Cutout</b> ∅ 20mm</p> <p><b>LED Operation Indicator</b></p> <ul style="list-style-type: none"> <li>• ON - Charging/Charged</li> <li>• OFF - Emergency Mode</li> </ul>	
<p><b>CIRCUIT TESTING</b></p> <p>For high voltage circuit insulation testing disconnect mains input supply first <b>(Do not circuit test using a Megger)</b></p>	<p><b>WARNING</b></p> <ol style="list-style-type: none"> <li>1. Installation only to be carried out by a qualified electrician</li> <li>2. Please ensure surface is suitable and capable of holding the unit weight</li> <li>3. Do not operate if product is damaged</li> <li>4. For use exclusively with Phoebe LED 40W Galanos Arteson range of panels only</li> </ol>	
<p><b>EMERGENCY TEST</b></p> <ul style="list-style-type: none"> <li>• Disconnect the permanent live power, the LED panel will illuminate to 30% in emergency function, the LED Indicator will turn off to show unit is discharging (note if the LED Indicator is off while permanent live is active, the unit is not charging).</li> </ul>	<p><b>Wiring Information</b></p>  <p>Please connect the internal battery cable before use.</p> <p><b>LED driver</b> Output</p> <p><b>LED Driver AC in</b></p> <p><b>AC in</b></p> <p><b>YH25B Series</b></p> <p><b>Connect to LED driver output</b></p> <p><b>Connect to LED Panel</b></p> <p><b>DC in</b></p> <p><b>AC in</b></p> <p><b>LED Panel light 80W max</b></p> <p>BLACK--Un-switched supply BROWN--Switched supply BLUE--Neutral GREEN/YELLOW--Earth</p>	
<p><b>Environmental Protection</b></p> <p>Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.</p>	<p>Images are for information only. Phoebe LED shall not be held liable for improper operation of the product in circumstances where procedures and specifications have not been followed correctly.</p> <p><b>Tel:</b> +44 (0)1274 657 088 <b>Fax:</b> +44 (0)1274 657 087 <b>Web:</b> www.cromptonlamps.com</p>	