




Manto Integrated LED Non-Corrosive IP65

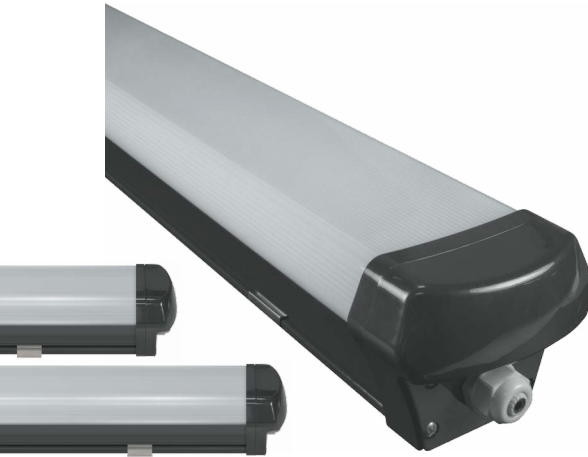


IP65 LED integrated luminaire. For use in industrial, garage, workshop and food preparation applications. Suitable for conduit, surface or suspension mounting.

- IP65 rated - Suitable for outdoor use
- Standard 4ft or 5ft lengths
- 4000K cool white colour temperature
- Colour rendering index Ra≥80
- Tough polycarbonate construction IK06 impact rating
- Long life 30,000 hours maintenance free operation
- Internal terminal block for safety
- Not suitable for dimming
- Emergency version has an integrated 3 hour emergency battery

Product Code	Product Description	Watts (W)	Volts (V)	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Beam Angle	Dimensions (mm)			Order Qty
								W	H	L	
Single Carton											
6959	Non-Corrosive IP65 4ft Luminaire	40	240	4000	3200	3800	120°	101	83	1200	1
6980	Non-Corrosive IP65 5ft Luminaire	55	240	4000	4700	5200	120°	101	83	1500	1
3 Hour Emergency - Single Carton **											
6973	Non-Corrosive IP65 4ft Luminaire with 3 Hour Emergency Kit	40	240	4000	3200	3800	120°	101	83	1200	1
7000	Non-Corrosive IP65 5ft Luminaire with 3 Hour Emergency Kit	55	240	4000	4700	5200	120°	101	83	1500	1

** Charging time 16 hours - Running time 3 hours.

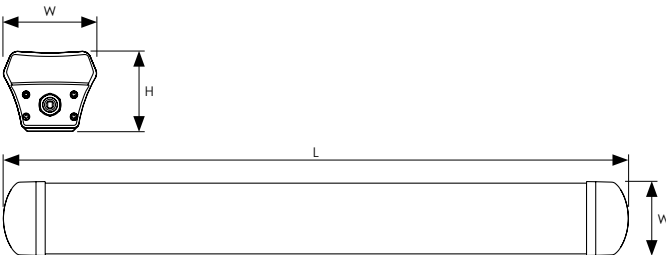

Lighting brilliance since 1878



Phoebe LED™ is a trading name of Crompton Lamps Limited
 Crompton Lamps Limited registered in England and Wales No. 05590551
 Registered office and correspondence address: Unit 2, Marrtree Business Park, Bowling Back Lane, Bradford BD4 8QE

Tel: +44 (0)1274 657 088 **Fax:** +44 (0)1274 657 087 **Email:** sales@phoebeled.com **Web:** www.phoebeled.com

All images and specifications are for illustration purposes only and are subject to change without notice.
 E. & O. E. © Crompton Lamps Limited 2018