




# PHOEBE LED LYKOS IP65 INTEGRATED CCT BATTENS

## Standard and Emergency Models Available

Designed with easy installation in mind and features two tool-less, loop-through terminal blocks with continuous live feed.

- 3000K/4000K/5700K Tri-Colour Select
- Loop-through continuous live feed
- IP65 rated
- IK08 impact rating
- 120° beam angle
- Toolless Internal terminal block
- 50,000 hour life
- 100,000 switching cycles
- 5 year warranty (3 Year Battery Warranty)




Available in standard and high output with 3 hour emergency options and 4ft, 5ft and 6ft lengths. Suitable for conduit, surface, or suspension mounting.

### Features IP65 Rating



- Protected against water in all directions
- Suitable for wet weather outdoor use
- Complete protection against contact dust

### Tri-Colour Select

<b>3000K</b> WARM WHITE	
<b>4000K</b> COOL WHITE	
<b>5700K</b> DAYLIGHT	

Select desired colour temperature using the Internal CCT switch

### Excellent Cost Savings

With low wattages across the range, 50,000 hour life and 100,000 switching cycles, the Lykos will save you money.

20W Annual running cost	30W Annual running cost	40W Annual running cost	60W Annual running cost	80W Annual running cost
<b>£7.34</b>	<b>£11.01</b>	<b>£14.69</b>	<b>£22.03</b>	<b>£22.37</b>


Figures are based on annual usage 7hrs/day @ £0.1437kWhr

# Technical Information

## IP65 Integrated LED CCT Batters



- 3000K/4000K/5700K Tri-Colour Select
- Loop-through continuous live feed
- IP65 rated
- IK08 impact rating
- 120° beam angle
- Toolless Internal terminal block
- 50,000 hour life
- 100,000 switching cycles
- 5 year warranty (3 Year Battery Warranty)

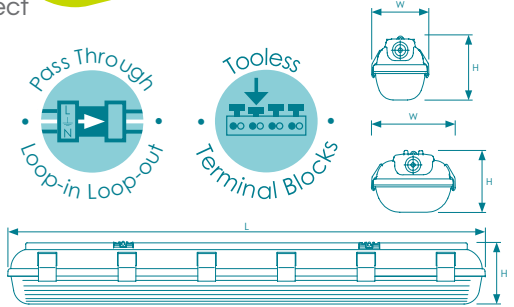

### Emergency

- Discharge  $\geq$  3 Hours
- LED Charge Indicator
- 24 hour Charge Time
- Self Test Function



Product Code	Product Description	Watts (W)	Volts (V)	Colour Temp (K)	Total Lumens (lm)	Beam Angle	Dimensions (mm)			Order Qty
							W	H	L	
<b>Standard - Single Carton</b>										
14251	4ft Batten	20	240	3000K/4000K/5700K	2000	120°	80	72	1200	1
14275	5ft Batten	30	240	3000K/4000K/5700K	3000	120°	80	72	1500	1
<b>Emergency - Single Carton</b>										
14268	4ft Batten with 3-Hour Emergency	20	240	3000K/4000K/5700K	2000	120°	80	72	1200	1
14282	5ft Batten with 3-Hour Emergency	30	240	3000K/4000K/5700K	3000	120°	80	72	1500	1
<b>High Output - Single Carton</b>										
14299	High Output (HO) 4ft Batten	40	240	3000K/4000K/5700K	4000	120°	105	87	1200	1
14312	High Output (HO) 5ft Batten	60	240	3000K/4000K/5700K	6000	120°	105	87	1500	1
14336	High Output (HO) 6ft Batten	80	240	3000K/4000K/5700K	8000	120°	105	87	1800	1
<b>Emergency High Output - Single Carton</b>										
14305	HO 4ft Batten with 3-Hour Emergency	40	240	3000K/4000K/5700K	4000	120°	105	87	1200	1
14329	HO 5ft Batten with 3-Hour Emergency	60	240	3000K/4000K/5700K	6000	120°	105	87	1500	1
14343	HO 6ft Batten with 3-Hour Emergency	80	240	3000K/4000K/5700K	8000	120°	105	87	1800	1

Crompton Lamps Limited registered in England and Wales No: 05590551

Crompton Lamps Limited  
 Unit 2  
 Marrtree Business Park  
 Bowling Back Lane  
 Bradford  
 BD4 8QE  
 Tel: 01274 657 088  
 Fax: 01274 657 087  
 Email: sales@cromptonlamps.com



Design and production by Marketing,  
 Crompton Lamps Limited  
 E. & O. E. © Crompton Lamps Limited 2019.  
 All rights reserved.

www.cromptonlamps.com

