


LED Antique Spiral Filament Candle Dimmable

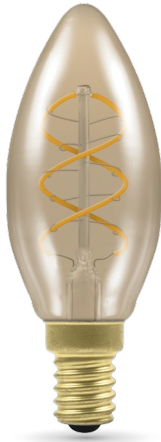


Energy saving LED replacement lamp featuring LED filament technology. LED spiral filaments FPC (flexible printed circuit) series filament arrangement, allowing true omni-directional light output. Full clear antiquated glass lamp to closely mimic old fashioned traditional lamps.

- 15,000 hour life
- 7,500 switching cycles
- 2200K extra warm white
- Colour rendering index Ra≥80
- SES-E14 cap
- Antique bronze finish
- Dimmable DuoDim™ Technology compatible with both leading and trailing edge dimmers*
- Recommended for indoor use only

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Incandescent Equivalent (W)	Dimensions (mm)		Energy Rating	Order Qty
								Dia	H		
Candle - Single Carton											
10642	3.5	240	SES-E14	Extra Warm White	2200	150	15	35	97	A	1

* The lamp is compatible with most dimmer switches, please refer to website for up-to-date list of compatible dimmer switches.



SES-E14 Cap



Lighting brilliance since 1878

Crompton Lamps Limited registered in England and Wales No. 05590551
 Registered office and correspondence address: Unit 2, Marrtree Business Park, Bowling Back Lane, Bradford BD4 8QE
Tel: +44 (0)1274 657 088 **Fax:** +44 (0)1274 657 087 **Email:** sales@cromptonlamps.com **Web:** www.cromptonlamps.com

All images and specifications are for illustration purposes only and are subject to change without notice.
 E. & O. E. © Crompton Lamps Limited 2019

LED Antique Spiral Filament Candle Dimmable



The below table is designed to help you choose a suitable dimmer switch for your Crompton Lamp dimmable product. Crompton Lamps have extensively tested the below dimmer switches to evaluate their dimming function and to make sure the dimmer switch meets our dimming compatibility standards.

All compatible dimmer switches may require low end trimming.

For guidelines on dimmer switches not listed below, or for more information please contact Crompton Lamps.

Manufacturer	Dimmer Model	Dimmer Wattage	Dimmer Type	Lamps Tested Per Circuit	Notes
Aurora	AU-DSP401	60W-400W	Leading	1-5	Steps 0 - 20%
Aurora	AU-DSP651	75W-650W	Leading	1-5	Steps 0 - 20% Flickers 95 - 100%
Aurora	AU-DSP400X	60W-400W	LED	1-5	Slight flicker at all levels
Danlers	DQDGEU400W	40W-400W	Trailing	1-5	Does not dim below 50%
Danlers	DSS1D 250W	40W-250W	Leading	1-5	Steps 0 - 50%
Danlers	DP1D 400WIET	60W-400W	Leading	1-5	Steps 0 - 20%
Danlers	DPDLED	5W-250W	Leading	1-5	Steps 0 - 20%
MK	K4511xxxLV	40W-220W	Leading	1-5	Dims smooth 0 - 80%
MK	K1521WHILV	40W-300W	Leading	1-5	Flickers 75 - 100%
MK	K1524WHILV	40W-300W	Leading	1-5	Dims smooth 0 - 80%
Zano	ZGRIDLED	5W-250W	LED	1-5	Dims smooth 5 - 100%
Zano	ZANOMO500	11W-50W	Leading	1-5	Dims 0 - 100% Steps 0 - 20%
Varilight	V-Pro JQP401W	10W-400W	Trailing	1-5	Dims smooth 0 - 100%
Varilight	V-Pro JQP252W	10W-250W	Trailing	1-5	Dims smooth 0 - 100%
Eaton	P9131	60W-250W	Leading	1-5	Dims 0 - 80% Steps 0 - 20%

The below list of dimmer switches have also been tested by Crompton Lamps and do not meet our dimming compatibility standards. Crompton Lamps does not recommend the use of any of the below dimmer switches as they may cause lamp/dimmer failure.

Danlers: DSS1D 400W

Lighting brilliance since 1878

