




Galanos LED Decorative Panel

						efficient with opt					
					 Aluminium reflector with prismatic diffuser, anti-glare with UGR <19 rating Long life 40,000 hours maintenance free 						
					operation • Cold rolled steel construction, phosphate						
	surface treated for corrosion resistance, flame resistance and wear resistance										
	 -20°C to 45°C operating temperature Instant full light 										
17- III	 Instant fullight Not suitable for dimming 										
	100	3 Hour Emergency Kit									
	Self-test function and charging indicator										
		(02	-					0 0		
					emer	n 4.0Ah l gency d	luration	June	y, 5 H	001	
	 Constant wattage emergency driver, switches between charge and discharging with power cut and restoration 										
Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (Im)	Total Lumens (Im)	Beam Angle			Order	
									(mm)		Qty
								W	L	D	
Single Carton											
6478	33	240	Cool White	4000	3100	3300	90°	595	595	56	1
3 Hour Emergenc	y Kit - Sing	gle Cart	on								
6485	3 Hour	Fmerae	ncy Kit with cho	araina ind	licator for L	FD Galanc	s Panel	104	240	51.7	1

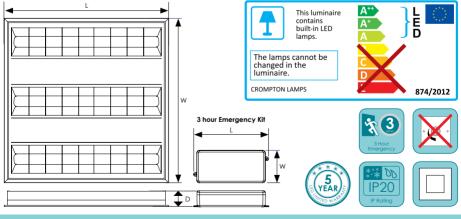

Phoebe LED™ is a trading name of Crompton Lamps Limited Crompton Lamps Limited registered in England and Wales No. 05590551 Registered office and correspondence address: Unit 2, Marrtree Business Park, Bowling Back Lane, Bradford BD4 8QE

Tel: +44 (0)1274 657 088 Fax: +44 (0)1274 657 087 Email: sales@cromptonlamps.com Web: www.cromptonlamps.com

All images and specifications are for illustration purposes only and are subject to change without notice. E. & O. E. © Crompton Lamps Limited 2019