


**PHOEBE
LED**

**LED FLEXI
STRIP-LIGHT**

*Ideal for Under-Cabinet, Garden Patio
and Concealed Accent Lighting Applications*

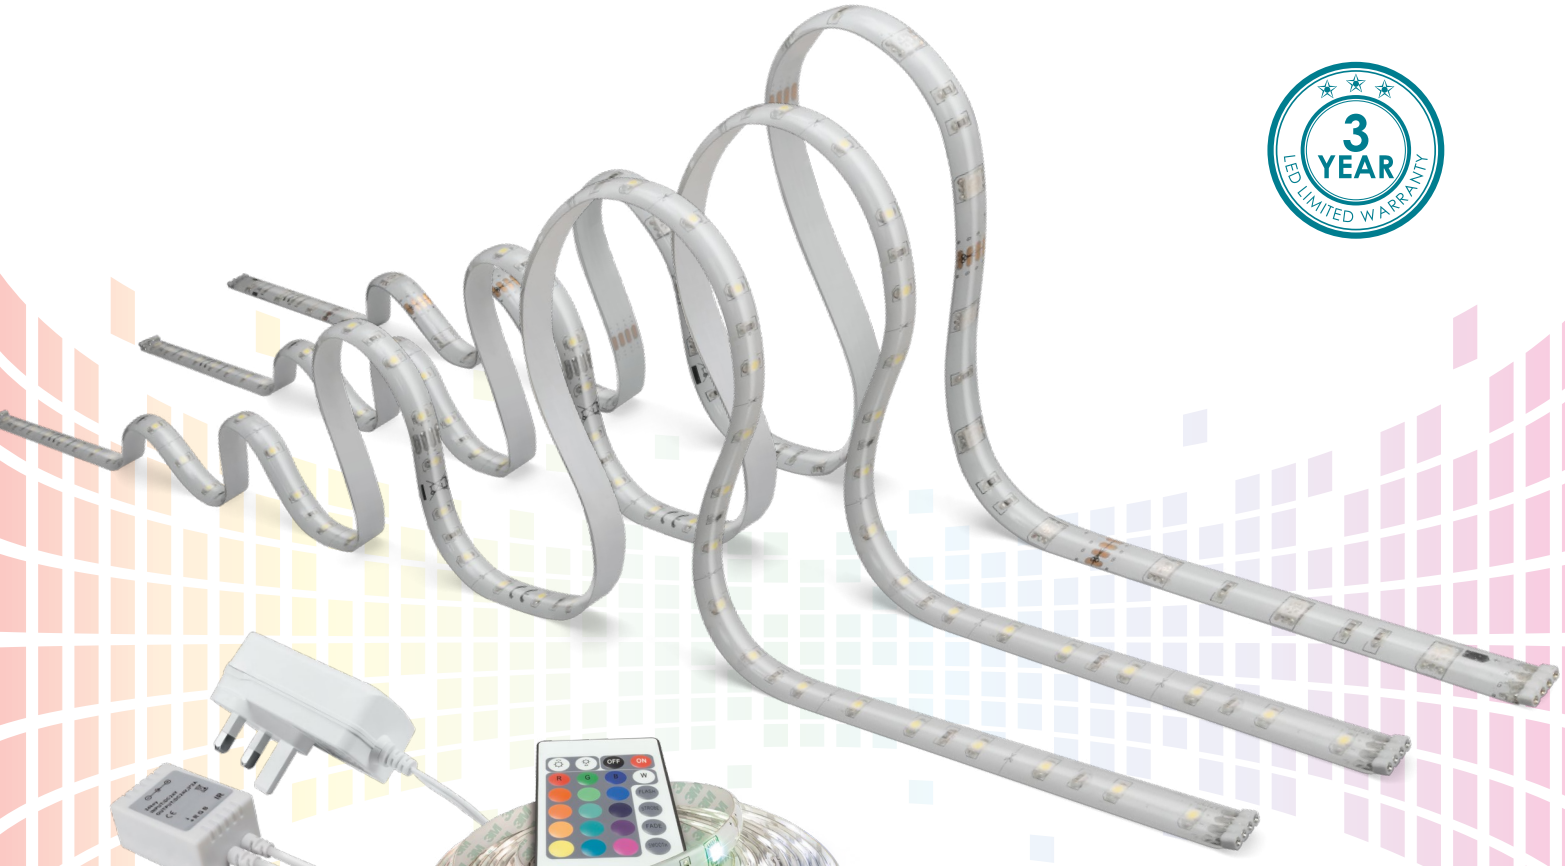

5m LED strip kits







IP65 Rated for Wet Weather Outdoor Use

30,000 Hour Life




Lighting brilliance since 1878



LED Flexi Strip-Light 5 Metre Kit

	Code	Description	Wattage	Voltage	Colour	Width	Length	Price
 	12516	5M LED Flexi Strip-Light RGB Contents: 1x IP65 5M LED Flexi Strip-Light RGB, 1x IP20 AC power adapter with integrated UK plug, 1x infrared remote control, 1x infrared receiver, 2x 10cm flexible connectors with clamp to both ends and 2x straight connectors with clamp to both ends	32W	24V	RGB	10mm	5000mm	
 	12493	5M LED Flexi Strip-Light WW Contents: 1x IP65 5M LED Flexi Strip-Light WW, 1x IP20 AC power adapter with integrated UK plug, 2x 10cm flexible connectors with clamp to both ends and 2x straight connectors with clamp to both ends	20W	24V	2700K Warm White	8mm	5000mm	
 	12509	5M LED Flexi Strip-Light CW Contents: 1x IP65 5M LED Flexi Strip-Light CW, 1x IP20 AC power adapter with integrated UK plug, 2x 10cm flexible connectors with clamp to both ends and 2x straight connectors with clamp to both ends	20W	24V	4000K Cool White	8mm	5000mm	

LED Flexi Strip-Light 5 Metre Kit Accessories

	Code	Description	Price
	12523	48W 24V power supply for use with 5m Strip Kits (12493/12509 - CW/WW), supports up to 10m in length Larger driver to support combined LED strips up to 10m in length	
	12530	60W 24V power supply for use with 5m Strip Kits (12516 - RGB), supports up to 10m in length Larger driver to support combined LED strips up to 10m in length	
	12547	Accessory Pack For 5m Strip Kits For re-connecting cut-off lengths of 5M LED Flexi Strip-Light Contents: 2x 15cm flexible connector with clamp to both ends (RGB), 2x 2x straight connectors with clamp to both ends (RGB) and 2x 15cm flexible connector with clamp to both ends (CW/WW), 2x 2x straight connectors with clamp to both ends (CW/WW)	

Lighting brilliance since 1878