



PHOEBE LED FLEXI STRIP-LIGHT KIT RGB 5m

INSTRUCTIONS RELEVANT TO PHOEBE LED FLEXI STRIP-LIGHT KIT RGB 5m PRODUCT ONLY

THANK YOU for buying this PHOEBE LED product. To help ensure this LED Flexi Strip-Light gives complete satisfaction please only use it according to the following instructions, and then pass the instructions to the appropriate person for retention and future reference.


Warranty

This product has been manufactured to strict quality standards and comes with a three-year manufacturer's warranty. If you have any cause for complaint then please contact the dealer where you purchased the product who will handle any replacements, where applicable.


Safety

1. Do not operate the LED Flexi Strip-Light if damage is visible.
2. If used on the floor the cable must be protected against unnecessary damage.
3. Make sure the power is switched off when cleaning or mounting the LED Flexi Strip-Light.
4. Do not look directly at the LED chips.
5. Do not cover the LED Flexi Strip-Light while in operation.
6. Do not connect the LED Flexi Strip-Light to other styles of LED Strip Light or other electrical devices.
7. Do not place the LED Flexi Strip-Light into household waste
8. Contact your local recycling agency for advice on how to recycle your LED Flexi Strip-Light

How to Affix the LED Flexi-Strip Light to a Surface




1. Peel back the 3M Adhesive backing.

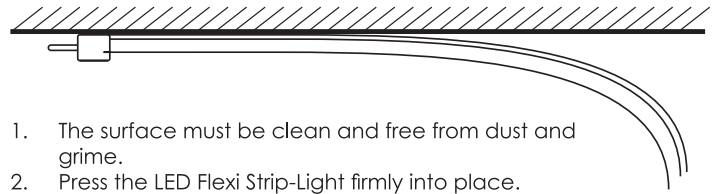


1. The surface must be clean and free from dust and grime.
2. Press the LED Flexi Strip-Light firmly into place.

Connecting the LED Flexi-strip:

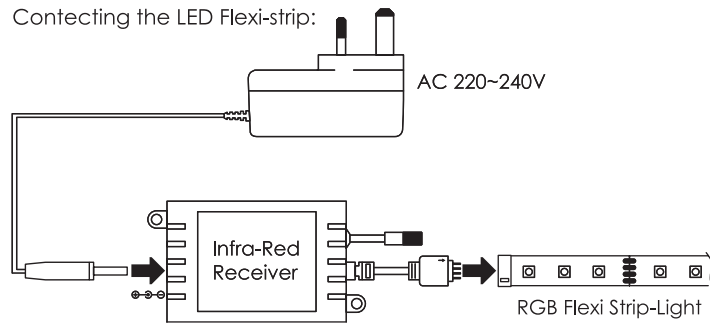


Cutting/Re-connecting the LED Flexi-Strip:

- 1: Cut strip carefully at the indicated points on the strip
- 2: To re-join use one of the supplied connecting leads
- 3: Open the end of the connector as shown
- 4: Line up the strip face up, ensure the + symbols are aligned
- 5: Close the connector firmly to pierce the LED Flexi-Strip

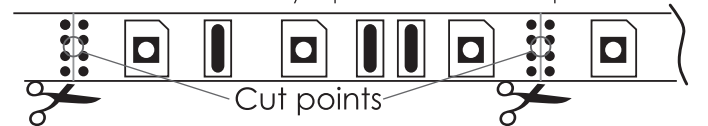

Contents: 5m LED RGB Flexi Strip-Light plus:

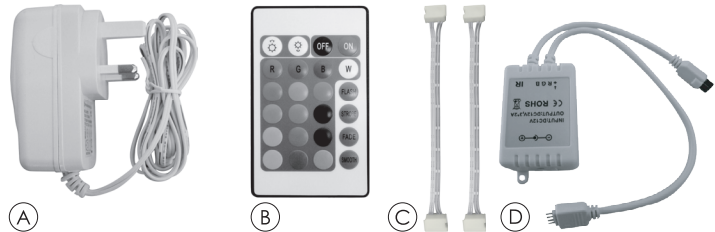


- A: UK 3-Pin Plug with Integrated Driver and Cable
- B: RGB Remote Control with included CR2025 3V Battery
- C: 2x 15cm Connecting Leads
- D: Infrared Receiver Box

Replacing the remote battery:

- 1: Open the battery compartment on the side of the remote by pushing the clamping pin and simultaneously extracting the compartment
- 2: Only use CR2025 3V battery type
- 3: Ensure the battery is inserted correctly with the positive side facing the (+) marked on the compartment
- 4: Slide the battery compartment into the remote

Remote Control Operation

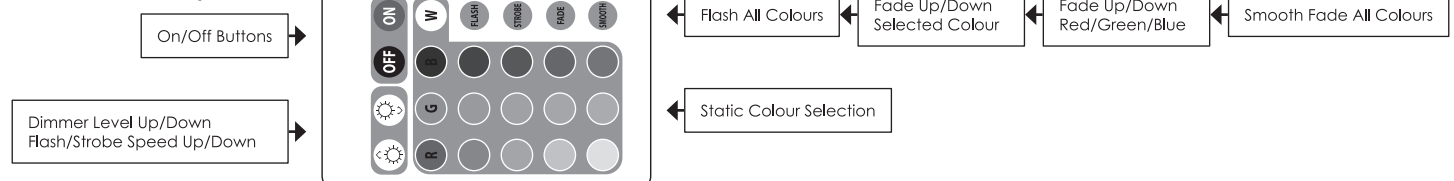

Images are for information only. Phoebe LED shall not be held liable for improper operation of the luminaire in circumstances where procedures and specifications have not been followed correctly.

Tel: +44 (0)1274 657 088 Fax: +44 (0)1274 657 087 Web: www.phoebeled.com