

Atlas-Mini LED Slim Floodlight



Energy efficient integrated LED slim-line floodlights with or without PIR sensor.

- Long life 35,000 hours maintenance free operation, 50,000 switching cycles
- Fully IP66 rated, including the PIR sensor
- -20°C to 40°C operating temperature
- 4000K cool white colour temperature
- Colour rendering index Ra≥80
- Diecast aluminium with black or white powder coat finish, stylish thin body design
- Angled mounting bracket for ease of installation without the need to disassemble the fitting
- Includes 80cm VDE cable

PIR Sensor Models

- Controls for time, sensitivity and lux levels
- 120° monitoring angle
- Fitted with 4 Core VDE cable for optional control of multiple floodlights*
- Max detection range selectable from 5-12m
- Light hold after detection selectable from 10 seconds to 8 minutes

Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Beam Angle	Halogen Equiv. (W)	Dimensions (mm)	Order Qty
--------------	-----------	-----------	-------------------	-----------------	--------------------	-------------------	------------	--------------------	-----------------	-----------

Single Carton

Black Finish	White Finish	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Beam Angle	Halogen Equiv. (W)	Dimensions (mm)	Order Qty
7581	10314	10	240	Cool White	4000	760	900	110°	70	140 130 30	1
6416	10338	20	240	Cool White	4000	1450	1600	110°	100	201 193 34	1
6430	10352	30	240	Cool White	4000	2200	2400	110°	150	201 193 34	1
6454	10376	50	240	Cool White	4000	3850	4200	110°	200	298 285 40	1

With PIR - Single Carton

Black Finish	White Finish	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Beam Angle	Halogen Equiv. (W)	Dimensions (mm)	Order Qty
7598	10321	10	240	Cool White	4000	760	900	110°	70	140 188 51	1
6423	10345	20	240	Cool White	4000	1450	1600	110°	100	201 229 51	1
6447	10369	30	240	Cool White	4000	2200	2400	110°	150	201 229 51	1
6461	10383	50	240	Cool White	4000	3850	4200	110°	200	298 285 55	1


*Extra core becomes live when PIR activated which allows for multiple fittings to be controlled by one PIR. (6423 ONLY)

This luminaire contains built-in LED lamps.

LED

The lamps cannot be changed in the luminaire.

CROMPTON LAMPS 874/2012

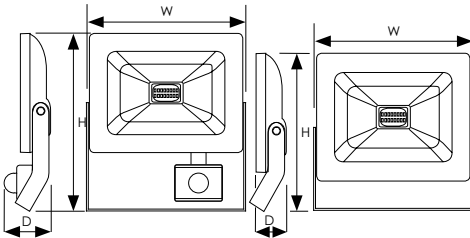

8 YEAR LIMITED WARRANTY

IP66 Rating

No lamp change

PIR Motion Sensor

Boat

Lighting brilliance since 1878



Phoebe LED™ is a trading name of Crompton Lamps Limited
 Crompton Lamps Limited registered in England and Wales No. 05590551
 Registered office and correspondence address: Unit 2, Martree Business Park, Bowling Back Lane, Bradford BD4 8QE
Tel: +44 (0)1274 657 088 **Fax:** +44 (0)1274 657 087 **Email:** sales@cromptonlamps.com **Web:** www.cromptonlamps.com

All images and specifications are for illustration purposes only and are subject to change without notice.
 E. & O. E. © Crompton Lamps Limited 2018