



Manto Integrated 2 Non-Corrosive IP65 Fitting




IP65 integrated fittings for use in industrial, garage, workshop and food preparation applications


- Suitable for conduit, surface, or suspension mounting
- Constructed from IK07 impact rated, moisture and acid resistant ABS body with Polycarbonate diffuser
- Internal terminal block for safety
- IP65 rated for wet weather outdoor use
- Tough ABS and Polycarbonate Construction IK07 Impact Rating
- 50,000 hour life, 15,000 switching cycles
- 120° beam angle
- 4000K cool white colour temperature
- Colour rendering index ≥80
- Not suitable for dimming
- 3 hour emergency function*
- Microwave sensor with variable detection range, hold time and lux sensors**

Product Code	Product Description	Watts (W)	Volts (V)	Colour Temp I (K)	Total Lumens (lm)	Beam Angle	Dimensions (mm)			Order Qty
							W	Н	L	
Single Carton										
11021	LED Non-Corrosive 4ft Single	20	240	4000	2000	120	85	75	1270	1
11038	LED Non-Corrosive 4ft Single with Microwave Sensor	20	240	4000	2000	120	85	75	1270	1
11045	LED Non-Corrosive 4ft Single with 3-Hour Emergency	20	240	4000	2000	120	85	75	1270	1
11052	LED Non-Corrosive 4ft Twin	40	240	4000	4000	120	118	75	1270	1
11069	LED Non-Corrosive 4ft Twin with Microwave Sensor	40	240	4000	4000	120	118	75	1270	1
11076	LED Non-Corrosive 4ft Twin with 3-Hour Emergency	40	240	4000	4000	120	118	75	1270	1
11083	LED Non-Corrosive 5ft Single	30	240	4000	3000	120	85	75	1570	1
11090	LED Non-Corrosive 5ft Single with Microwave Sensor	30	240	4000	3000	120	85	75	1570	1
11106	LED Non-Corrosive 5ft Single with 3-Hour Emergency	30	240	4000	3000	120	85	75	1570	1
11113	LED Non-Corrosive 5ft Twin	60	240	4000	6000	120	118	75	1570	1
11120	LED Non-Corrosive 5ft Twin with Microwave Sensor	60	240	4000	6000	120	118	75	1570	1
11137	LED Non-Corrosive 5ft Twin with 3-Hour Emergency	60	240	4000	6000	120	118	75	1570	1

^{*} EM Dischage \geq 3 Hours, 16 hour charge time required.

^{** 25%-100%} Detection rage (Max 10m) 5s-30min Hold time 2-2000lum light sensor Dims to 15% light output when sensor not triggered.



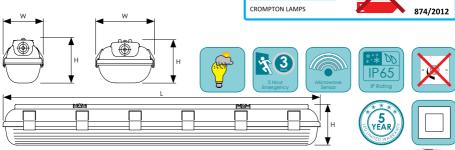

Liahtina brilliance since 1878

Phoebe LED™ is a trading name of Crompton Lamps Limited
Crompton Lamps Limited registered in England and Wales No. 05590551
Registered office and correspondence address: Unit 2, Marrtree Business Park, Bowling Back Lane, Bradford BD4 8QE

YEARS