



Atlas-Mini LED Slim Floodlight



Energy efficient integrated LED slim-line floodlights with or without PIR sensor.

- Long life 35,000 hours maintenance free operation, 50,000 switching cycles
- Fully IP66 rated, including the PIR sensor - suitable for use outdoors
- -20°C to 40°C operating temperature
- Die-cast aluminium with black or white powder coat finish, stylish thin body design
- Angled mounting bracket for ease of installation without the need to disassemble the fitting
- Includes 80cm VDE cable

PIR Sensor Models

- Controls for time, sensitivity and lux levels
- 120° monitoring angle
- Fitted with 4 Core VDE cable for optional control of multiple floodlights*
- Max detection range selectable from 5-12m
- Light hold after detection selectable from 10 seconds to 8 minutes

Product Code	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Beam Angle	Halogen Equiv. (W)	Dimensions (mm) W H D	Order Qty
--------------	-----------	-----------	-------------------	-----------------	--------------------	-------------------	------------	--------------------	-----------------------	-----------

Single Carton

Black Finish	White Finish	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Beam Angle	Halogen Equiv. (W)	Dimensions (mm) W H D	Order Qty
7581	10314	10	240	Cool White	4000	760	900	110°	70	140 130 30	1
6416	10338	20	240	Cool White	4000	1450	1600	110°	100	201 193 34	1
6430	10352	30	240	Cool White	4000	2200	2400	110°	150	201 193 34	1
6454	10376	50	240	Cool White	4000	3850	4200	110°	200	298 285 40	1

With PIR - Single Carton

Black Finish	White Finish	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Useful Lumens (lm)	Total Lumens (lm)	Beam Angle	Halogen Equiv. (W)	Dimensions (mm) W H D	Order Qty
7598	10321	10	240	Cool White	4000	760	900	110°	70	140 188 51	1
6423	10345	20	240	Cool White	4000	1450	1600	110°	100	201 229 51	1
6447	10369	30	240	Cool White	4000	2200	2400	110°	150	201 229 51	1
6461	10383	50	240	Cool White	4000	3850	4200	110°	200	298 285 55	1

*Extra core becomes live when PIR activated which allows for multiple fittings to be controlled by one PIR.

This luminaire contains built-in LED lamps.

A++

A+

A


C

D

LED

The lamps cannot be changed in the luminaire.

CROMPTON LAMPS 874/2012

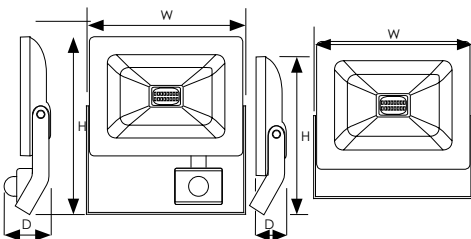

Lighting brilliance since 1878

Phoebe LED™ is a trading name of Crompton Lamps Limited
 Crompton Lamps Limited registered in England and Wales No. 05590551
 Registered office and correspondence address: Unit 2, Martree Business Park, Bowling Back Lane, Bradford BD4 8QE
Tel: +44 (0)1274 657 088 **Fax:** +44 (0)1274 657 087 **Email:** sales@cromptonlamps.com **Web:** www.cromptonlamps.com

All images and specifications are for illustration purposes only and are subject to change without notice.
 E. & O. E. © Crompton Lamps Limited 2019