




Single Turn L Type (PLL)

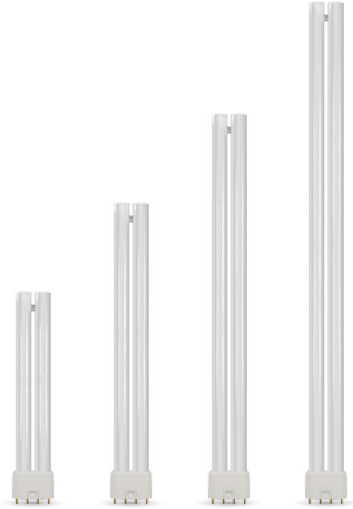

Compact L fluorescent lamps for commercial luminaires such as downlights, bulkheads and many other applications.

- 10,000 hour life
- 3500K white, 4000K cool white or 6500K daylight colour options
- 85/1B colour rendering index/group
- SPECTRA-PLUS Triphosphor coated for excellent colour rendering, high output and longer life
- Suitable for dimming and use in emergency luminaires
- Separate ballast/control gear required
- Internally fused for safety

Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Dimensions (mm)		Energy Rating	Order Qty
							Dia	H		
Single Carton										
CLL18SW	18	240	2G11	White	3500	1206	44	226	B	10
CLL18SCW	18	240	2G11	Cool White	4000	1206	44	226	B	10
CLL24SW	24	240	2G11	White	3500	1800	44	321	A	10
CLL24SCW	24	240	2G11	Cool White	4000	1800	44	321	A	10
CLL36SW	36	240	2G11	White	3500	2920	44	416	A	10
CLL36SCW	36	240	2G11	Cool White	4000	2920	44	416	A	10
CLL40SW	40	240	2G11	White	3500	3320	44	536	A	10
CLL40SCW	40	240	2G11	Cool White	4000	3320	44	536	A	10
CLL55SW	55	240	2G11	White	3500	4510	44	536	A	10
CLL55SCW	55	240	2G11	Cool White	4000	4510	44	536	A	10
CLL55SDYLT	55	240	2G11	Day Light	6500	4510	44	536	A	10



Lighting brilliance since 1878

Crompton Lamps Limited registered in England and Wales No. 05590551
 Registered office and correspondence address: Unit 2, Marrtree Business Park, Bowling Back Lane, Bradford BD4 8QE
Tel: +44 (0)1274 657 088 **Fax:** +44 (0)1274 657 087 **Email:** sales@cromptonlamps.com **Web:** www.cromptonlamps.com

All images and specifications are for illustration purposes only and are subject to change without notice.
 E. & O. E. © Crompton Lamps Limited 2018